

## SP06气雾润滑泵

### 概述 Description

SP06气雾润滑泵是一种压缩空气驱动的喷雾、冷却型柱塞泵。该泵在压缩空气驱动下将定量润滑剂泵送到与之配套使用的喷枪中，压缩空气带动润滑剂在喷枪出口雾化，向润滑点提供连续喷射状的润滑剂和冷却剂。适用粘度在20~2000cst的润滑油以及浓度不小于10%的乳化液。无喷枪配套时，则可独立做气动柱塞泵使用。

SP06气雾润滑泵可广泛应用于金属切削，塑料工业切割，灌装食品消毒，链条润滑等各种需要喷雾的场所。

The SP06 is a spraying and cooling piston pump driven by compressing air. On the compressing air driving, the metering lubricant were transferred to the spraying gun which was used with the SP06, to be fog at the outlet of the spraying gun. By the process, it can supply the continuing lubricant and cooling emulsion. Usually, viscosity of the oil is from 20~2000cst and concentration of the emulsion is above 10%. Without the spraying gun, SP06 can be as the piston pump driven by compressing air.

SP06 pump is applied in cutting machines, plastic cutting, food disinfecting, chain lubricating and other place under the spraying.

### 特点 Feature

- 润滑油和乳化液均可使用;
- 起到润滑和冷却双重作用;
- 单次出油量可调节;
- Lubricant and emulsion can be used;
- Lubricating and cooling function;
- Discharge can be adjust;


### 主要技术参数 Specification

输入气压范围(Mpa)	压缩比	出油调整范围(ml)	油罐容积(L)	适用介质
0.5~0.8	1:4	2~10	4, 6	20~2000cst 润滑剂及乳化液


Scope of compressing air(Mpa)	Pump ratio	Discharge (ml)	Reservoir (L)	Viscosity
0.5~0.8	1:4	2~10	4, 6	20~2000cst



### 外形尺寸 Dimensions

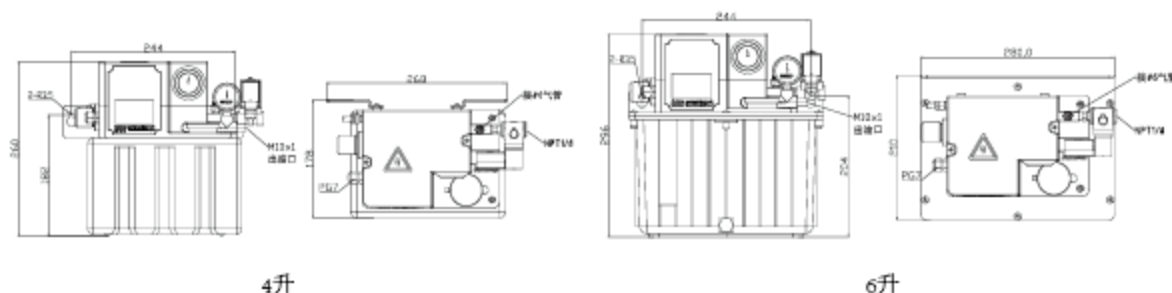

### 配套喷枪 Matching spray gun

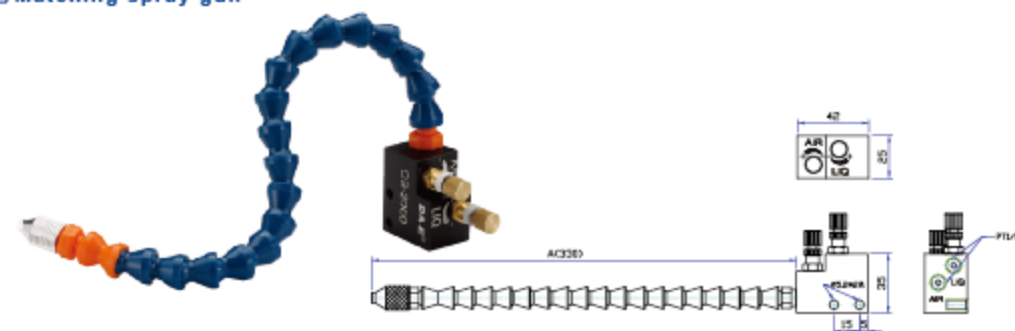

### 订货代号说明 Ordering Information

型号	规格	控制器	泵电磁阀		喷射电磁阀		油罐容积	
			220VAC	24VDC	220VAC	24VDC	4 升	6 升
SP06	SP06-0101	无		*			*	
	SP06-0202		*					*
	SP06-0111			*		*	*	
	SP06-0222		*		*			*
	SP06-1201	*	*				*	
	SP06-1222		*		*			*

SP 0 6 — \*

控制器 Controller

0: 没有  
1: 有 (仅 220VAC)

\*

泵电磁阀

Pump Valve Voltage  
1: 24VDC  
2: 220VAC

\*

喷射电磁阀

Spraying Valve Voltage  
0: 无  
1: 24VDC  
2: 220VAC

\*

油罐容积

Oil reservoir  
1: 4 升油罐  
2: 6 升油罐

示范: SP06-1221

表示内置控制器和泵电磁阀以及喷射阀接入电源均为220VAC的4升油罐的喷雾泵。